


HUSKY 50 EXTERIOR - TIMBER

Capacity:

- Maximum door weight: 50kg.
- Maximum door height: 2400mm.
- Door thickness: 20mm - 50mm.

Application:

For areas exposed to extreme corrosive elements or where a high level of hygiene is essential, Henderson has developed a stainless steel range. Manufactured from high level anodised aluminium and stainless steel and incorporating the latest polymers, this gear offers a high level of performance and corrosion resistance. This Henderson stainless steel range can be used for an array of applications including chemical factories, oil rigs, abattoirs, cold storage, food processing plants and areas exposed to harsh coastal environmental conditions.

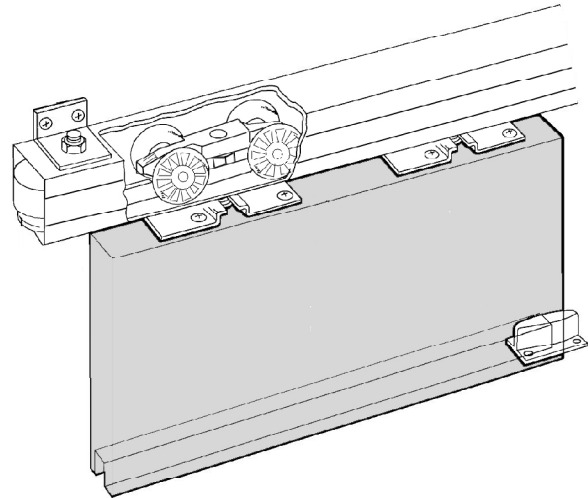

Components:

- Top Track - aluminium anodised (280A/NAA). Available in 1.25m, 1.5m, 1.6m, 2m, 2.5m, 3m, 3.2m, 4m and 4.5m.
- Bracket - Husky, face fix (281/SS).
- Hanger - Husky, 50kg, top-fix, stainless, (284N/SS), timber application.
- Stop - inline track stop, stainless, (287/SS).
- Guide - timber application, floor or wall mounted (31S).
- Roller Guide - stainless, plate fixing (106RB/94).
- Guide channel - brass (94). Available in 1.6m, 2m, 2.5m, 3m and 3.2m lengths.
- Guide channel - aluminium anodised (94XNAA). Available in 1.6m, 2m, 2.5m, 3m and 3.2m lengths.
- Guide channel - polypropylene (94P). Available in 2m, 3m, 4m and 6m lengths.
- Guide channel - polypropylene with aluminium support (94PA). Available in 2m, 3m, 4m and 6m lengths.

Optional Extras:

- Flush Bolts.
- Flush Pulls.
- Locks - a wide variety of locking options are available within the Interlock range of products.

Please note:



- Please refer to component section for component options and technical detail.

HUSKY 50 EXTERIOR - TIMBER

EXT



HUSKY 50 EXTERIOR - TIMBER

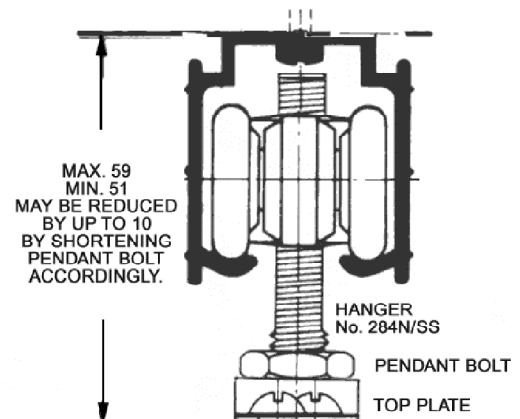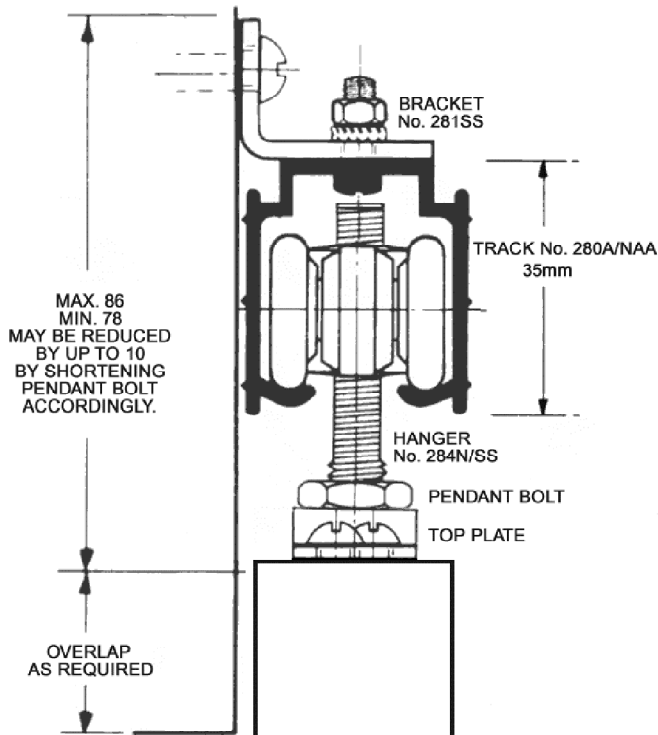

ALTERNATIVE GUIDE

